




High-Density Digital I/O and Timer for StackableUSB™ USB3148

Features

- ✓ 53 user controllable TTL-level I/O lines
- ✓ Timers/counters, switches/LEDs
- ✓ 10-bit single-ended/differential A/D
- ✓ Two (2) RS232 serial ports, one (1) each I2C and SPI bus interfaces
- ✓ StackableUSB 2.0 device with stacktogether connectors for embedded systems or plug/cable configuration for remote applications

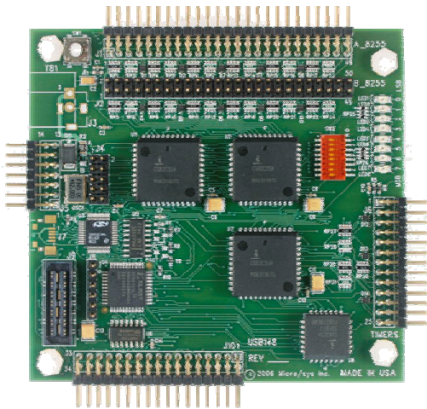

The USB3148 operates as a USB 2.0 Full-speed device in a StackableUSB system or connected to a PC using a standard USB cable. Three (3) 82C55's provide 53 lines of bi-directional general system I/O. An on-board 82C54 provides three (3) counter/timers. There are also two (2) RS232 serial ports, one (1) each I2C and SPI bus interface, a single comparator, and a 10-bit A/D converter. The USB3148 provides this wealth of system I/O on a small 3.55 x 3.755 footprint.

The USB interface, in the stackable or cable configuration, allows the USB3148 to be

added into any USB system by using the standard USB plug-and-play hardware and software configuration after installing the software provided for the host computer. This significantly simplifies user's system integration.

The USB3148 implements many features to enhance system reliability. Software programmable pull ups/downs on each I/O line provide deterministic reset levels. The USB3148 protects against power sequencing issues with other boards in the stack or system by providing current limiting resistors on all I/O lines.

Software Support


Windows XP
Windows CE
Linux

Compatible Hardware

StackableUSB Host single board
computers or microcontrollers
PC Host desktops and laptops

Mounting/Packaging

ENC104-4
Standoffs, STDOFFUSB

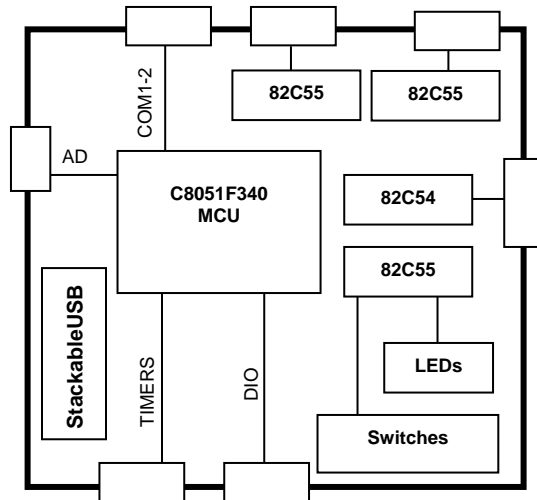

Technical Details:

Three (3) 82C55 digital I/O devices provide 53 lines of TTL I/O. Direction of the I/O signals is programmable in two (2) 8-bit groups and two (2) 4-bit groups for each 82C55. The 82C55 TTL I/O lines can source and sink at 2.5mA. An on-board 82C54 devices provides three (3) 16-bit timer/counters.

The USB3148 comes with pre-installed software that allows the transfer of data between the USB port and all of the on-board peripherals with no need to write additional code on the USB3148 device side of the system. To ease installation of the USB3148 on the host side, USB drivers and example source code are supplied, eliminating the need for prior USB experience. Host side operating systems supported are Linux, WindowsCE, and Windows XP.

A command and control protocol implemented over the USB interface allows direct communication with the on-board peripherals via inport and outport driver calls executed on the host computer. A custom interrupt service routine can be called directly by the host side USB driver. The USB3148 utilizes a microcontroller with a built-in USB device controller which acts as

the communication channel between the on-board peripherals and the StackableUSB host computer. The USB3148 is USB 2.0 compliant and supports both full-speed (12Mbps) and low-speed (1.5Mbps) transfer rates.

Other peripherals coming from the microcontroller include a single-ended or differential input A/D with a range of 0 to 3.3V. Conversions can be triggered from timers or from an external pin. There are two (2) serial ports, COM1 and COM2, configured with RS232 transceivers with the TXD and RXD lines supported. Other system level functions included on the USB3148 are an interrupt controller and a watchdog timer.

The on-board microcontroller includes 64k of flash, and 4352 bytes of SRAM which allows users to write board specific control routines for the USB3148. Most instructions are executed in one or two system clock cycles, allowing the MCU to achieve performance as high as 48 MIPS. This feature can off load the host CPU of interrupt service routines, reserving the USB communication link for sending system level commands rather than directly controlling each event.

The StackableUSB bus architecture allows up to five (5) USB peripheral boards to be stacked above and/or below a single board computer, making ten (10) board systems with any combination of StackableUSB boards possible without the use of a hub. Please call Micro/sys Technical Sales for details.

Specifications:

Mechanical:

- PC/104 mounting holes
- 3.55" (plus I/O region) x 3.775" x .6"

Power Requirements:

- +5v \pm 5% at 320mA max

Environmental:

- Operating range 0°C to +70°C
- ET-version operating range -40° to +85°C
- 40° to +85°C storage
- 5%-95% relative humidity, non-condensing

Microcontroller Core Section:

- Silicon Laboratories 8051
- 48MHz clock rate
- Optimized 8051 instruction set
- 64kbytes of flash memory
- 4352bytes of SRAM

USB Interface:

- USB 2.0 full-speed
- USB device or function controller only
(Controller does not operate as a host)

Serial Ports:

- Two (2) async serial ports
- RS232 levels
- TXD and RXD signals supported for both ports

SMBus/I2C Port:

- Configurable as master or slave
- Clock speeds up to 4.8MHz

SPI Bus:

- Single-master, single-slave only
- Clock speeds up to 12.5MHz

Analog Input:

- 10-bit resolution, successive-approximation register ADC
- 0 to 3.3V range
- Conversion starts from timer or external pin
- 200kps
- Single-ended or differential inputs

Watchdog Timer:

- Program must refresh watchdog timer periodically, or system will be reset
- Enabled through software

Debug/Download Interface:

- Silicon Laboratories 2-wire C2 interface
- Allows programming of program flash or debugging of user application

Digital I/O:

- Three (3) 82C55s provide 53 lines of TTL-level digital I/O, 2.5mA source/sink
- Software-configurable pull up/downs on I/O for initialization after reset
- 470-ohm current limiting resistors
- Grounds for all systems

Timer/Counter:

- 82C54 provides three (3) 16-bit timer/counters
- Software-configurable in/external clock and cascading

Switch/LEDs:

- 8-position switch, eight (8) LEDs from dedicated 82C55

External Connections:

- 14-pin header for COM1-COM2
- 80-pin high density connector for digital I/O
- 26-pin header for timer, external-clock, external IRQ, additional digital I/O
- 10-pin header for debug/download
- 34-pin header for MCU signals (ADC, timers, DIO, I2C, comparators)
- 2-pin removable terminal strip for power

Development Kit:

- Base module
- Complete cable set
- Documentation, schematics, sample software

Ordering Information:

OEM Modules:

USB3148-ST	High-Density DIO and Timer board with StackableUSB stackthrough connector
USB3148-ST-ET	High-Density DIO and Timer board with StackableUSB stack-through connector; -40° to +85°C operating temperature
USB3148-PC	High-Density DIO and Timer board with Mini-B USB connector for PC connection
USB3148-PC-ET	High-Density DIO and Timer board with Mini-B USB connector for PC connection; -40° to +85°C operating temperature
CS3148	Complete cable set

Related Products:

CA4089	Breakout cable to two (2) DB9 COM port connectors
BA4089	Breakout assembly to two (2) DB9 COM port connectors
TB50540	40-pin to 40-pin ribbon cable with 50-point screw terminal breakout board
BA0034	34-pin to 34-pin ribbon cable with 34-point screw terminal breakout board
BA0028	26-pin to 26-pin ribbon cable with 26-point screw terminal breakout board
CA5049	50-pin to 50-pin ribbon cable
CA5050	34-pin to 34-pin ribbon cable
CA5051	26-pin to 26-pin ribbon cable

Cables nominally 15", other lengths available

Development Board Kits*

DK3148-ST-ET	High-Density DIO and Timer board with StackableUSB stackthrough connector, -40° to +85°C operating temp, Windows-ready development kit
DK3148-PC-ET	High-Density DIO and Timer board with Mini-B USB connector for PC connection; -40° to +85°C operating temp, Windows-ready development kit

**See Development Kit Specifications*